


# SPECIFICATION

ITEM		MODEL		<b>XZU600J</b>	<b>XZU600K</b>	<b>XZU640K</b>	
ENGINE	MODEL			N04C-UY	N04C-VA		
	TYPE	Diesel, 4-cy.,vertical, 4-cyl. in-line, overhead valve, water cooled, direct Injection					
	DISPLACEMENT	cc	4,009				
	MAX OUTPUT (JIS GROSS)	kw(PS)/rpm	84.6 (115) / 2,800		104 (142) / 2,500		
	MAX. TORQUE (JIS GROSS)	Nm(kgfm)/rpm	324 (33) / 1,600		402 (41) / 1,600		
	BORE & STROKE	mm	104 x 118				
	FUEL INJECTION SYSTEM	Electronic control Commonrail type					
	AIR INTAKE SYSTEM	Turbo-intercooled, stack type					
CLUTCH	TYPE	Dry single plate, diaphragm type with damper spring					
	DIAMETER	mm	300				
TRANSMISSION	MODEL/NO. OF SPEED	M550 / 5-Speed / Manual					
	TYPE	Five (5) forward and one (1) reversed, overdrive, synchromesh 1 <sup>st</sup> - 5 <sup>th</sup>					
	RATIO (1st - Top)	4.981 / 0.738					
AXLE	FRONT	TYPE	Reversed Elliot, "I" section beam				
		CAPACITY	kg	2,600			
	REAR	TYPE	Full floating, single reduction, single speed by hypoid gearing				
		CAPACITY	kg	4,400			
BRAKE	SERVICE BRAKE TYPE	Hydraulic system with ventilated disc for front wheels and drum brakes for rear wheels with auto brake shoe adjuster					
	SERVICE BRAKE CONTROL	Vacuum servo hydraulic, dual circuits with Antilock Braking System (ABS) and power assist					
	PARKING BRAKE TYPE	Mechanical, internal expanding, acting on transmission output shaft					
	EXHAUST BRAKE TYPE	Electric-vacuum actuator with valve in exhaust pipe					
SUSPENSION	FRONT TYPE	Semi elliptic leaf spring with dual acting shock absorber and stabilizer					
	REAR TYPE	Semi elliptic main and auxiliary leaf spring with dual acting shock absorber					
FRAME	FRAME WIDTH	mm	700				
	HEIGHT x WIDTH x THICKNESS	mm	192 x 65 x 6.0				
CABIN	TILTING	Mechanical Type					
	STEERING	Telescopic & tilt steering column with locking device, recirculating ball with hydraulic booster, integral type					
	POWER WINDOW	Equipped					
	CENTRAL LOCKING	Equipped					
WHEELS & TIRES	SEAT BELT	Equipped					
	WHEEL TYPE	5 studs					
	RIM SIZE	17.5 x 6.00 - 95					
ELECTRICAL	TIRE SIZE	215/75R - 17.5					
	TYPE	24V, Negative Earth					
	BATTERIES	12V x 2 , Series connection					
FUEL TANK CAPACITY	ALTERNATOR CAPACITY	24V - 60 Amps					
	L	80		100			
<b>PERFORMANCE</b>							
G.V.W Rating	kg	4,800					
PERFORMANCE	MAX SPEED	km/h	100 (*with Speed Limiter)				
	GRADEABILITY	(tan Ø) %	40.3	53.2			
TRANSMISSION RATIO	MODEL	M550					
	1st	4.981					
	2nd	2.911					
	3rd	1.556					
	4th	1.000					
	5th	0.738					
REAR AXLE	REVERSE	4.625					
	MODEL	BD26A					
	RATIO	4.625					
<b>DIMENSION &amp; MASS</b>							
CHASSIS MASS (with std tools set & spare tire)	FRONT AXLE	kg	1,365		1,405		
	REAR AXLE	kg	650		675		
	TOTAL	kg	2,015		2,080		
DIMENSION	WHEELBASE	WB	mm	2,525		3,075	
	OVERALL LENGTH	OL	mm	4,680		5,465	
	OVERALL WIDTH	OW	mm	1,695			
	OVERALL HEIGHT	OH	mm	2,135		2,130	
	CAB TO AXLE CENTER	CA	mm	1,945		2,495	
	FRONT OVERHANG	FOH	mm	985			
	REAR OVERHANG	ROH	mm	1,135		1,370	
	FRONT TREAD	FT	mm	1,440			
	REAR TREAD	RT	mm	1,390			
	TURNING RADIUS (on tire)	mm		5,500		6,100	
SEATING CAPACITY			3				

HINO MOTORS SALES (MALAYSIA) SDN. BHD. is engaged in an ongoing research and development program, and reserves the right to change specification without prior notice in order to pass on to the customer any resulting advances or technical refinements. All specifications of the product are within normal manufacturing allowances and tolerances.

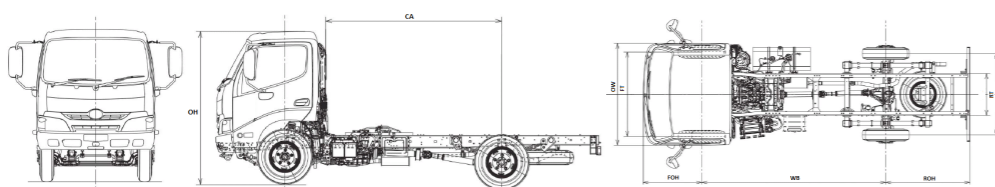

HINO Authorized Dealer:

Ver. 02/12.2016



# HINO 300 SERIES

Compliance with United Nations Regulation (UNR) by JPJ



**XZU600J** 115ps

**XZU600K** 142ps

**XZU640K** 142ps

Designed GVW 4,800 kg (4 Wheeler)




HINO MOTORS SALES (MALAYSIA) SDN BHD (187863-U)

Selangor: Lot PT 24, Jalan 223, Section 51A, 46100 Petaling Jaya, Selangor Darul Ehsan, Malaysia. Tel: (603) 7957 5199 (12 lines) Fax: (603) 7954 3276  
Sarawak: Lot 1076, Block 218, 4th Mile, Penrissen Road, 93250 Kuching, Sarawak, Malaysia. Tel: (082) 451 611 (5 lines) Fax: (082) 451 993  
Sabah: Miles 4 1/2 Jalan Tuaran, Lot No. 353, Taman Cempaka, Likas, 88450 Kota Kinabalu, Sabah, Malaysia. Tel: (088) 393 663 Fax: (088) 424 223

www.hino.com.my

## PERFORMANCE

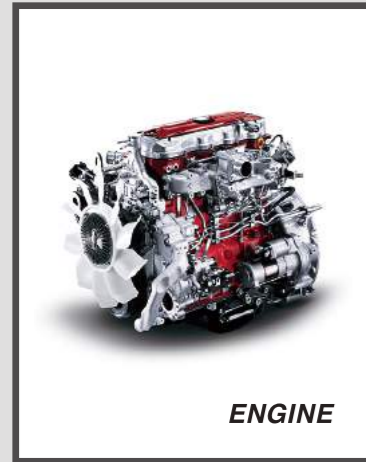

**EURO 3**  
**XZU600-J**

**N04C-UY**  
Engine:  
4,009cc 4-cylinder in-line  
Electronic Control  
Commonrail

Output (kW/rpm):  
84.6 (115PS)/2,800rpm



Torque (Nm/rpm):  
324Nm (33kgfm)/1,600rpm

**EURO 3**  
**XZU600-K**  
**XZU640-K**

**N04C-VA**  
Engine:  
4,009cc 4-cylinder in-line  
Electronic Control  
Commonrail

Output (kW/rpm):  
104 (142PS)/2,500rpm

Torque (Nm/rpm):  
402Nm (41kgfm)/1,600rpm

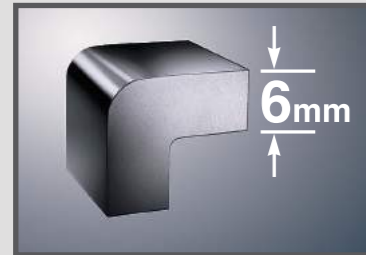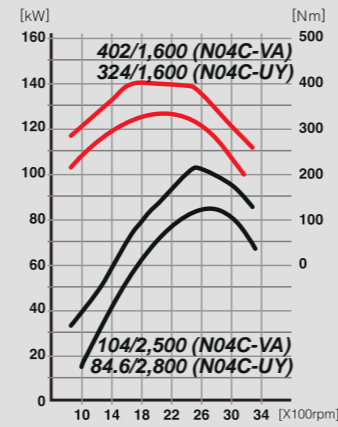

### Frame

The frame is both very strong and lightweight



### Suspension

The leaf spring suspension offers high durability and flexibility for stability on rough roads.

## COMFORTABILITY



### Seat Slide

The seat rails are set on an incline to accommodate your seating position.



### Folding Type Shift Lever

The shift lever and side lever fold down, making it easy to move around the driver compartment.



### LED Meter Panel

The meter cluster features highly visible readouts of necessary vehicle information.



### Overhead Console

Greater convenience for documents storage with open section which allows easy access.



### Wide Free Rack


Ergonomically designed open storage space and within driver's reach for greater convenience.



### Work space

Intuitively designed, roomy and comfortable, the cab space allows drivers to perform at their best.

## SAFETY

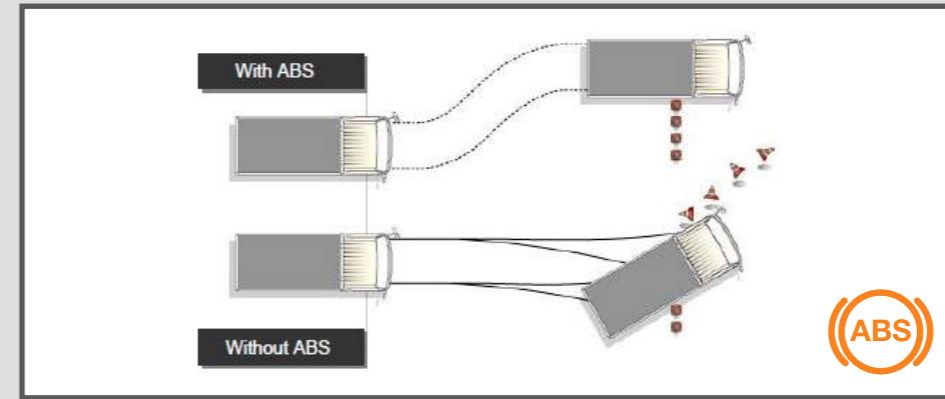


### Antilock Braking System (ABS)

ABS helps the driver maintain control of the vehicle when braking on a slippery surface by selectively controlling the braking force of individual wheel in order to prevent the wheels from locking.



### EGIS Cab (Emergency Guard Impact Safety)

The EGIS Cab Design is one of HINO'S passive safety features, enhancing the rigidity of the cab.



### Disc Brake (Front)

Ventilated disc brake is used for maximum heat dissipation to ensure safe and effective braking. It features easy maintenance without compromising on performance.



### Tubeless Tyres

Provides good tyre puncture resistance for better safety. Better fuel efficiency due to lighter tyre and lower rolling resistance.



### Stabilizer

The stabilizer have been lengthened and feature a link bracket, maintaining high effectiveness and stability.



### Door Impact Beams

The side impact beams built into the doors of 300 Series increase the level of protection for driver and passenger in the event of a collision from the side.




### Side Mirror

The door-mounted outer mirrors enhance driver's vision. It features partitioned mirror surfaces encased in an aerodynamic and low-profile shell.



### Wide View Pillars

The front pillars are designed to be as narrow as possible to ensure a nearly uninterrupted view, allowing the driver to easily see pedestrians and cyclist, without any compromise in structural integrity.



### Energy-Absorbing Steering Wheel and Column


The energy-absorbing steering wheel and column reduce collision force.



### Headlamp Leveling Switch

The Headlamp Leveling Switch can be used to adjust the headlamp illumination distance.

## APPLICATION




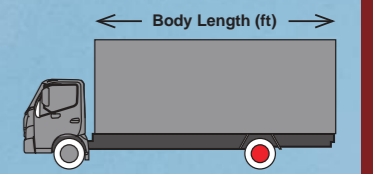


Model	XZU600	XZU640
Standard	10.3	13.0
Optional	13.1	14.2

● Drive Axle

### Body Type

A truck for every application of bodies suit your type of business.



Note : Some images may be used for illustration purposes only.