


# SPECIFICATION

ITEM		MODEL				
		<b>XZU710L</b>	<b>XZU720L</b>	<b>XZU730L</b>		
ENGINE	MODEL	N04C-VB				
	TYPE	Diesel, 4-cy.,vertical, 4-cyl. in-line, overhead valve, water cooled, direct injection				
	DISPLACEMENT	cc 4,009				
	MAX OUTPUT (JIS GROSS)	kW(PS)/rpm 114 (156) / 2,800				
	MAX. TORQUE (JIS GROSS)	Nm(kgfm)/rpm 429 (43.8) / 1,400				
	BORE & STROKE	mm 104 x 118				
	FUEL INJECTION SYSTEM	Electronic control commonrail type				
	AIR INTAKE SYSTEM	Turbo-intercooled, stack type				
CLUTCH	TYPE	Dry single plate, diaphragm type with damper spring				
	DIAMETER	mm 325				
TRANSMISSION	MODEL/NO. OF SPEED	M550 / Manual 5-Speed				
	TYPE	Five (5) forward and one (1) reverse, overdrive, synchromesh 1 <sup>st</sup> - 5 <sup>th</sup>				
	RATIO (1st - Top)	4.981 / 0.738				
AXLE	FRONT	TYPE	Reversed Elliot, "I" section beam			
		CAPACITY	kg 3,100			
	REAR	TYPE	Full floating, single reduction, single speed by hypoid gearing			
		CAPACITY	kg 5,100			
BRAKE	SERVICE BRAKE TYPE	Hydraulic system with two leading shoes for front wheels and dual two leading shoes for rear wheels with auto brake shoe adjuster				
	SERVICE BRAKE CONTROL	Vacuum servo hydraulic, dual circuits with Antilock Braking System (ABS) and power assist				
	PARKING BRAKE TYPE	Mechanical, internal expanding, acting on transmission output shaft				
	EXHAUST BRAKE TYPE	Electric-vacuum actuator with valve in exhaust pipe				
SUSPENSION	FRONT TYPE	Semi elliptic leaf spring with dual acting shock absorber and stabilizer				
	REAR TYPE	Semi elliptic main and auxiliary leaf spring with dual acting shock absorber				
FRAME	FRAME WIDTH	mm 750				
	HEIGHT x WIDTH x THICKNESS	mm 192.8 x 65 x 5.9				
CABIN	TILTING	Mechanical Type				
	STEERING	Telescopic & tilt steering column with locking device, recirculating ball with hydraulic booster, integral type				
	POWER WINDOW	Equipped				
	CENTRAL LOCKING	Equipped				
WHEELS & TIRES	SEAT BELT	Equipped				
	WHEEL TYPE	6 studs				
	RIM SIZE	17.5 x 6.00GS - 127				
ELECTRICAL	TIRE SIZE	215/75 R 17.5 - 12PR				
	TYPE	24V, Negative Earth				
	BATTERIES	12V x 2 , Series connection				
FUEL TANK CAPACITY	ALTERNATOR CAPACITY	24V - 60 Amps				
		L 100				
<b>PERFORMANCE</b>						
G.V.W Rating		kg 5,000				
PERFORMANCE	MAX SPEED	km/h 100 (* With Speed Limiter)				
	GRADEABILITY	(tan Ø) % 44.9				
TRANSMISSION RATIO	MODEL	M550				
	1st	4.981				
	2nd	2.911				
	3rd	1.556				
	4th	1.000				
	5th	0.738				
REAR AXLE	REVERSE	4.625				
	MODEL	SH12				
	RATIO	5.125				
<b>DIMENSION &amp; MASS</b>						
CHASSIS MASS (with std tools set & spare tire)	FRONT AXLE	kg	1,580	1,595	1,615	
	REAR AXLE	kg	910	910	925	
	TOTAL	kg	2,490	2,505	2,540	
DIMENSION	WHEELBASE	WB	mm	3,430	3,870	4,200
	OVERALL LENGTH	OL	mm	6,120	6,740	7,250
	OVERALL WIDTH	OW	mm		1,995	
	OVERALL HEIGHT	OH	mm		2,230	
	CAB TO AXLE CENTER	CA	mm	2,870	3,310	3,640
	FRONT OVERHANG	FOH	mm		1,115	
	REAR OVERHANG	ROH	mm	1,575	1,755	1,935
	FRONT TREAD	FT	mm		1,655	
	REAR TREAD	RT	mm		1,520	
	TURNING RADIUS (on tire)		mm	5,700	6,400	6,900
	SEATING CAPACITY				3	

HINO MOTORS SALES (MALAYSIA) SDN. BHD. is engaged in an ongoing research and development program, and reserves the right to change specification without prior notice in order to pass on to the customer any resulting advances or technical refinements. All specifications of the product are within normal manufacturing allowances and tolerances.

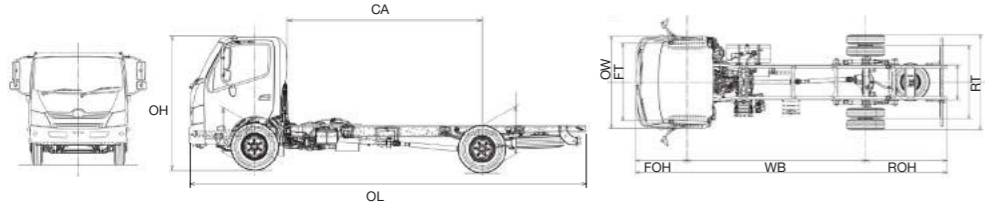

HINO Authorized Dealer:

Ver. 01/1.2017



# HINO 300 SERIES

**POWER**

Compliance with United Nations Regulation (UNR) by JPJ



**XZU710L** 156ps  
**XZU720L** 156ps  
**XZU730L** 156ps

Designed GVW 5,000 kg (6 Wheeler)

**WARRANTY\***  
**36 MONTHS**  
 or 100,000KM

**FREE\***  
 SERVICE PROGRAM  
**3 TIMES**  
 (1<sup>st</sup>-3<sup>rd</sup> Service)

**FREE\***  
 PARTS PROGRAM  
**7 TIMES**  
 (4<sup>th</sup>-10<sup>th</sup> Service)

**BREAKDOWN**  
**24 HOURS SERVICE**  
Applicable to West Malaysia  
 Toll Free: 1800-88-3666

Terms and Conditions apply\*


**HINO MOTORS SALES (MALAYSIA) SDN BHD (187863-U)**

Selangor: Lot PT 24, Jalan 223, Section 51A, 46100 Petaling Jaya, Selangor Darul Ehsan, Malaysia. Tel: (603) 7957 5199 (12 lines) Fax: (603) 7954 3276  
 Sarawak: Lot 1076, Block 218, 4th Mile, Penrissen Road, 93250 Kuching, Sarawak, Malaysia. Tel: (082) 451 611 (5 lines) Fax: (082) 451 993  
 Sabah: Miles 4 1/2 Jalan Tuaran, Lot No. 353, Taman Cempaka, Likas, 88450 Kota Kinabalu, Sabah, Malaysia. Tel: (088) 393 663 Fax: (088) 424 223

www.hino.com.my



## PERFORMANCE

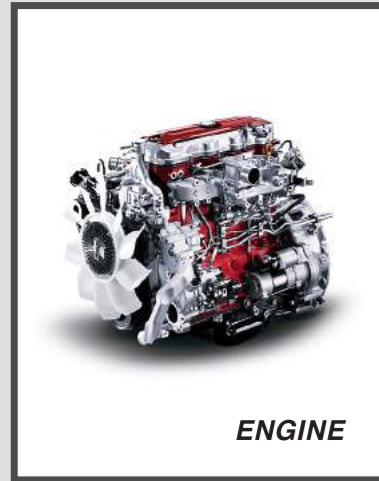



**EURO 3**

**XZU710L**  
**XZU720L**  
**XZU730L**

Model:  
**N04C-VB**  
Type:  
4,009cc 4-cylinder in-line  
Electronic Control  
Commonrail

Output (kW/rpm):  
114 (156PS)/2,800rpm

Torque (Nm/rpm):  
429Nm (43.8kgfm)/1,400rpm

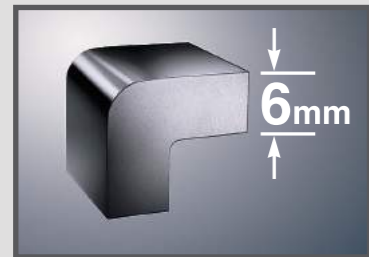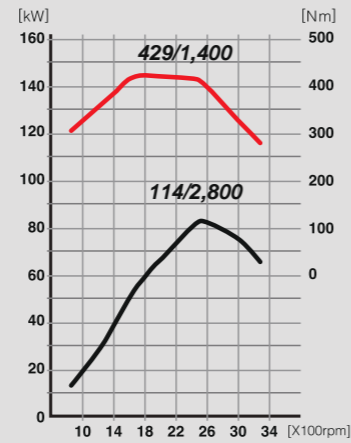

### Frame


The frame is both very strong and lightweight



### Suspension

The leaf spring suspension offers high durability and flexibility for stability on rough roads.

## COMFORTABILITY

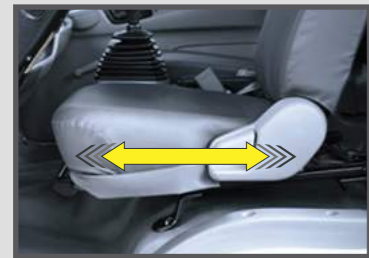

### Seat Slide

The seat rails are set on an incline to accommodate your seating position.



### Folding Type Shift Lever

The shift lever and side lever fold down, making it easy to move around the driver compartment.



### LED Meter Panel

The meter cluster features highly visible readouts of necessary vehicle information.



### Overhead Console

Greater convenience for documents storage with open section which allows easy access.



### Wide Free Rack


Ergonomically designed open storage space and within driver's reach for greater convenience.



### Work Space

Intuitively designed, spacious and comfortable, the cab space allows drivers to perform at their best.

## SAFETY

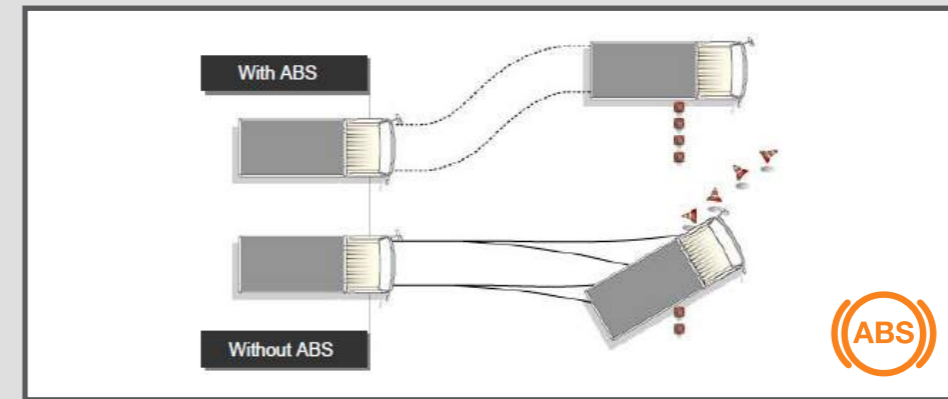

### Antilock Braking System (ABS)

ABS helps the driver maintain control of the vehicle when braking on a slippery surface by selectively controlling the braking force of individual wheel in order to prevent the wheels from locking.



### EGIS Cab (Emergency Guard Impact Safety)

The EGIS Cab Design is one of HINO'S passive safety features, enhancing the rigidity of the cab.



### Drum Brake

Equipped with auto brake shoe adjuster to ensure safe & effective braking. It features easy maintenance without compromising on performance.



### Tubeless Tyres

Provides good tyre puncture resistance for better safety. Better fuel efficiency due to lighter tyre and lower rolling resistance.



### Stabilizer

The stabilizer have been lengthened and feature a link bracket, maintaining high effectiveness and stability.



### Door Impact Beams

The side impact beams built into the doors of 300 Series increase the level of protection for driver and passenger in the event of a collision from the side.




### Side Mirror

The door-mounted outer mirrors enhance driver's vision. It features partitioned mirror surfaces encased in an aerodynamic and low-profile shell.




### Wide View Pillars

The front pillars are designed to be as narrow as possible to ensure a nearly uninterrupted view, allowing the driver to easily see pedestrians and cyclist, without any compromise in structural integrity.



### Energy-Absorbing Steering Wheel and Column


The energy-absorbing steering wheel and column reduce collision force.



### Headlamp Leveling Switch

The Headlamp Leveling Switch can be used to adjust the headlamp illumination distance.

## APPLICATION





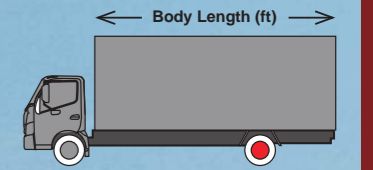


Model	XZU710L	XZU720L
Standard	14.7	16.9
Optional	17.5 20.2 21.4	17.5 20.2 21.4

Model	XZU730L	Drive Axle
Standard	14.7	
Optional	18.5	

### Body Type

A truck for every application of bodies suit your type of business.



Note : Some images may be used for illustration purposes only.