


SPECIFICATION

ITEM		MODEL		XZU720LC	
ENGINE	MODEL	N04C-VB			
	TYPE	Diesel, 4-cy.,vertical, 4-cyl. in-line, overhead valve, water cooled, direct injection			
	DISPLACEMENT	cc	4,009		
	MAX OUTPUT (JIS GROSS)	kW(PS)/rpm	114 (156) / 2,800		
	MAX. TORQUE (JIS GROSS)	Nm(kgfm)/rpm	429 (43.8) / 1,400		
	BORE & STROKE	mm	104 x 118		
	FUEL INJECTION SYSTEM	Electronic control Commonrail type			
	AIR INTAKE SYSTEM	Turbo-intercooled, stack type			
CLUTCH	TYPE	Dry single plate, diaphragm type with damper spring			
	DIAMETER	mm	325		
TRANSMISSION	MODEL/NO. OF SPEED	M550 / Manual 5-Speed			
	TYPE	Five (5) forward and one (1) reverse, overdrive, synchromesh 1 st - 5 th			
	RATIO (1st - Top)	4.981 / 0.738			
AXLE	FRONT	TYPE	Reversed Elliot, "I" section beam		
		CAPACITY	kg	3,100	
	REAR	TYPE	Full floating, single reduction, single speed by hypoid gearing		
		CAPACITY	kg	5,100	
BRAKE	SERVICE BRAKE TYPE	Hydraulic system with two leading shoes for front wheels and dual two leading shoes for rear wheels with auto brake shoe adjuster			
	SERVICE BRAKE CONTROL	Vacuum servo hydraulic, dual circuits with Antilock Braking System (ABS) and power assist			
	PARKING BRAKE TYPE	Mechanical, internal expanding, acting on transmission output shaft			
	EXHAUST BRAKE TYPE	Electric-vacuum actuator with valve in exhaust pipe			
SUSPENSION	FRONT TYPE	Semi elliptic leaf spring with dual acting shock absorber and stabilizer			
	REAR TYPE	Semi elliptic main and auxiliary leaf spring with dual acting shock absorber			
FRAME	FRAME WIDTH	mm	750		
	HEIGHT x WIDTH x THICKNESS	mm	192.8 x 65 x 5.9		
CABIN	TILTING	Mechanical Type			
	STEERING	Telescopic & tilt steering column with locking device, recirculating ball with hydraulic booster, integral type			
	POWER WINDOW	Equipped			
	CENTRAL LOCKING	Equipped			
	SEAT BELT	Equipped			
WHEELS & TIRES	WHEEL TYPE	6 stud			
	RIM SIZE	17.5 x 6.00GS - 127			
	TIRE SIZE	215/75R17.5-12PR			
ELECTRICAL	TYPE	24V, Negative Earth			
	BATTERIES	12V x 2 , Series connection			
	ALTERNATOR CAPACITY	24V - 60 Amps			
FUEL TANK CAPACITY	L	100			
PERFORMANCE					
G.V.W Rating	kg	5,000			
PERFORMANCE	MAX SPEED	km/h	100 (* With Speed Limiter)		
	GRADEABILITY	(tan Ø) %	44.9		
TRANSMISSION RATIO	MODEL	M550			
	1st	4.981			
	2nd	2.911			
	3rd	1.556			
	4th	1.000			
	5th	0.738			
	REVERSE	4.625			
REAR AXLE	MODEL	SH12			
	RATIO	5.125			
DIMENSION & MASS					
CHASSIS MASS (with std tools set & spare tire)	FRONT AXLE	kg	1,700		
	REAR AXLE	kg	995		
	TOTAL	kg	2,695		
DIMENSION	WHEELBASE	WB	mm	3,870	
	OVERALL LENGTH	OL	mm	6,740	
	OVERALL WIDTH	OW	mm	1,995	
	OVERALL HEIGHT	OH	mm	2,235	
	CAB TO AXLE CENTER	CA	mm	2,300	
	FRONT OVERHANG	FOH	mm	1,115	
	REAR OVERHANG	ROH	mm	1,755	
	FRONT TREAD	FT	mm	1,655	
	REAR TREAD	RT	mm	1,520	
	TURNING RADIUS (on tire)	6,400			
	SEATING CAPACITY	7 (Subject to JPJ Approval)			

HINO MOTORS SALES (MALAYSIA) SDN. BHD. is engaged in an ongoing research and development program, and reserves the right to change specification without prior notice in order to pass on to the customer any resulting advances or technical refinements. All specifications of the product are within normal manufacturing allowances and tolerances.

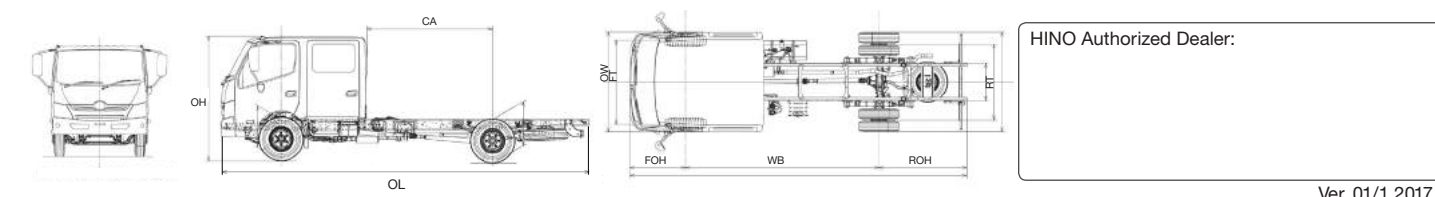

Ver. 01/1.2017



HINO 300 SERIES

Compliance with United Nations Regulation (UNR) by JPJ



XZU720CREW 156ps

Designed GVW 5,000 kg (6 Wheeler)

WARRANTY*
36 MONTHS
 or 100,000KM

FREE*
 SERVICE PROGRAM
3 TIMES
 (1st-3rd Service)

FREE*
 PARTS PROGRAM
7 TIMES
 (4th-10th Service)

BREAKDOWN
24 HOURS SERVICE
Applicable to West Malaysia
 Toll Free: 1800-88-3666


Terms and Conditions apply*

HINO MOTORS SALES (MALAYSIA) SDN BHD (187863-U)

Selangor: Lot PT 24, Jalan 223, Section 51A, 46100 Petaling Jaya, Selangor Darul Ehsan, Malaysia. Tel: (603) 7957 5199 (12 lines) Fax: (603) 7954 3276
 Sarawak: Lot 1076, Block 218, 4th Mile, Penrissen Road, 93250 Kuching, Sarawak, Malaysia. Tel: (082) 451 611 (5 lines) Fax: (082) 451 993
 Sabah: Miles 4 1/2 Jalan Tuaran, Lot No. 353, Taman Cempaka, Likas, 88450 Kota Kinabalu, Sabah, Malaysia. Tel: (088) 393 663 Fax: (088) 424 223

www.hino.com.my



PERFORMANCE

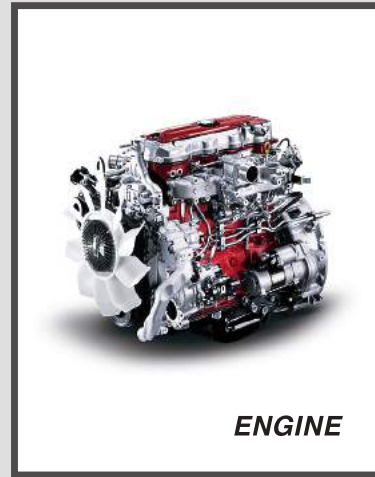

EURO 3
XZU720 CREW

Model:
N04C-VB
Type:
**4,009cc 4-cylinder in-line
Electronic Control
Commonrail**

Output (kW/rpm):
114 (156PS)/2,800rpm
Torque (Nm/rpm):
429Nm (43.8kgfm)/1,400rpm

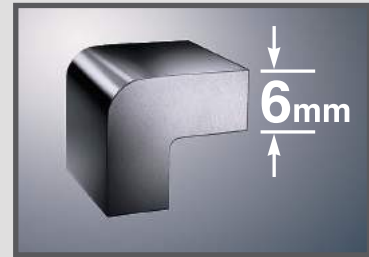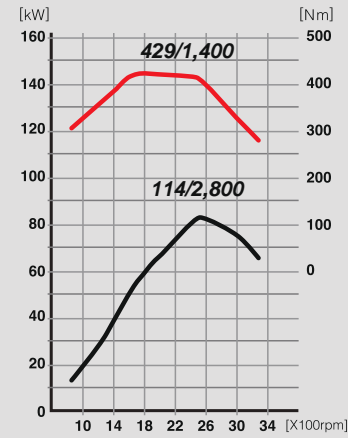

Frame


The frame is both very strong and lightweight



Suspension

The leaf spring suspension offers high durability and flexibility for stability on rough roads.

COMFORTABILITY

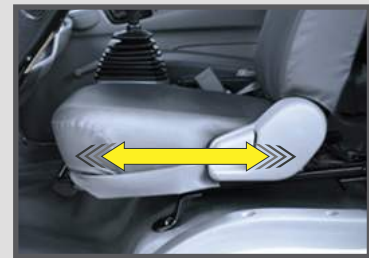

Seat Slide

The seat rails are set on an incline to accommodate your seating position.



Folding Type Shift Lever

The shift lever and side lever fold down, making it easy to move around the driver compartment.



Ergonomics and Accessibility (Crew Cab: Rear Seat)

Plenty of space for 4 adults (*2 adults shown).
Generous storage space when the seat is stowed.
*Seating capacity: 7 seater (Subject to JPJ Approval)



LED Meter Panel

The meter cluster features highly visible readouts of necessary vehicle information.



Overhead Console


Greater convenience for documents storage with open section which allows easy access.



Work Space

Intuitively designed, spacious and comfortable, the cab space allows drivers to perform at their best.

SAFETY

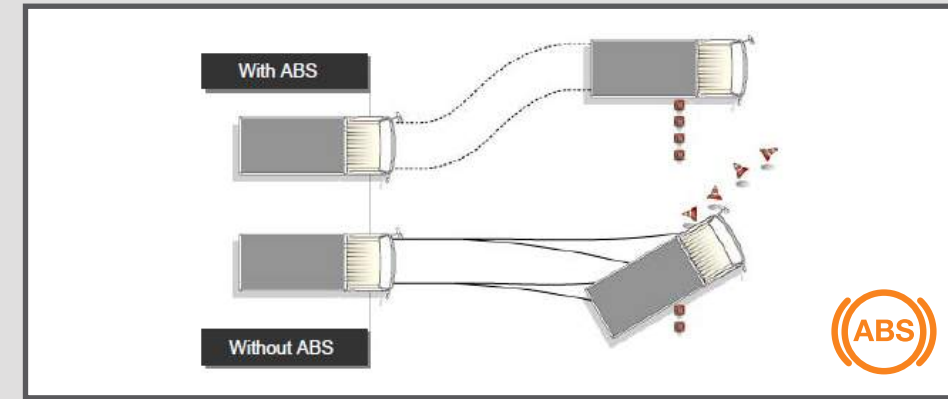

Antilock Braking System (ABS)

ABS helps the driver maintain control of the vehicle when braking on a slippery surface by selectively controlling the braking force of individual wheel in order to prevent the wheels from locking.



EGIS Cab (Emergency Guard Impact Safety)

The EGIS Cab Design is one of HINO'S passive safety features, enhancing the rigidity of the cab.



Drum Brake

Equipped with auto brake shoe adjuster to ensure safe & effective braking. It features easy maintenance without compromising on performance.



Tubeless Tyres

Provides good tyre puncture resistance for better safety. Better fuel efficiency due to lighter tyre and lower rolling resistance.



Stabilizer

The stabilizer have been lengthened and feature a link bracket, maintaining high effectiveness and stability.



Door Impact Beams

The side impact beams built into the doors of 300 Series increase the level of protection for driver and passenger in the event of a collision from the side.




Side Mirror

The door-mounted outer mirrors enhance driver's vision. It features partitioned mirror surfaces encased in an aerodynamic and low-profile shell.



Wide View Pillars

The front pillars are designed to be as narrow as possible to ensure a nearly uninterrupted view, allowing the driver to easily see pedestrians and cyclist, without any compromise in structural integrity.



Energy-Absorbing Steering Wheel and Column


The energy-absorbing steering wheel and column reduce collision force.



Headlamp Leveling Switch

The Headlamp Leveling Switch can be used to adjust the headlamp illumination distance.

APPLICATION




Model	XZU720 CREW
Standard	13.1
Optional	11.7


● Drive Axle

Body Type


A truck for every application of bodies suit your type of business.




General Cargo




Box




Curtain Sider



Refrigerated




Tipper




Crane Cargo



Roll On Roll off



Tanker



Garbage Compactor

Note : Some images may be used for illustration purposes only.